

Zetta Z15 HD Security Camcorder Quick Start Guide

Overview

Congratulations on your purchase of Zetta Z15 HD security camcorder!

Zetta Z15 is an intelligent security camcorder with multi-function triggering and multi auto on/off modes. The camcorder comes with a built-in rechargeable battery which can record up to 10 hours continuous video and sound during typical use and standby for more than 4 months when vibration triggering is enabled. By plugging in the 5V DC adapter, it can achieve 168 hours circular recording.*

* Actual life and performance may vary depending upon usage and settings; battery not replaceable.

Features

Circular recording – loop back recording once memory card is full

Time stamp – put time stamp on video

Schedule recording – set the time to automatically turn on / off recording, 7-day circular

Vibration-trigger recording – select to record only when vibration is detected

Motion-trigger recording – select to record only when motion is detected

Voice-trigger recording – select to record only when voice is detected

Auto on/off mode – select different auto on/off scenarios

Selectable day/night mode – select day mode or night mode to suit your environment

Auto gapless split file – gaplessly split files for every 10 / 15 / 20 minutes

Orientation – use when the camcorder is turning up-side-down

Selectable resolution – recording of 1280x720(720p) or 640x360(360p) video and sound

Frame rate adjustment – lower the frame rate to save memory space

Configurable video quality – high / medium / low

Support max 64GB microSD(TF) card (for better performance, use card with class 4 or above and before use, format the card as FAT32 only)

Package Contents

Please unpack your intelligent security camcorder and check that the following were included:

Zetta Z15 HD security camcorder


5V DC Adapter

USB 2.0 Cable

Quick Start Guide

Note: The configuration tool is not included in the package, please download it from <http://www.zetta.com.hk>

Zetta Z15 at a Glance

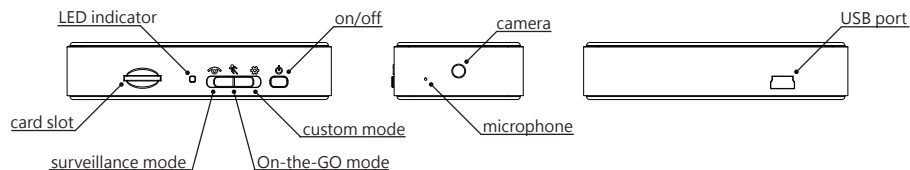

Charging

The camcorder comes with an internal rechargeable battery. To use the camcorder for the first time or not using the camcorder for a long time, remember to fully charge the battery for at least 6 hours and resync the time by using the Zetta Widget (see section "Configuration Tool"). You can charge your camcorder through the USB port of your computer or the DC adapter.

To charge the battery through USB port, connect the USB cable to the USB port of the computer and the camcorder. For details, please see the status below. The camcorder will function as a mass storage device, you will not be able to record video at this moment.

To charge the battery through DC adapter, connect the DC adapter to the camcorder. For details, please see the status below. Moreover, you will also be able to record video while charging, depending on the mode you set.

Recording

The power button is located at the right side of the camcorder. It can turn the camcorder on or off.

Start Recording

Press and hold the Power button until the green LED is on (approximately 2 seconds), and then release the button. When you see the green LED flashing, the camcorder is recording. Otherwise, please see the status below.

Stop Recording

Press and hold the Power button until the orange LED is off (for approximately 2 seconds).

WARNING: Turn off camcorder before removing card!

Status

Without DC adapter

Green LED on: camcorder is booted up

Green LED flashing: normal recording

Green / Red LED intermittent flashing: battery low and recording

Red LED on: no card, card fail, battery low or card full (not in circular recording)

DC adapter plugged in

Orange LED on: charging but no recording

Green LED on: charging complete but no recording

Green LED flashing: charging complete and recording

Green / Orange LED intermittent flashing: charging and recording

Red LED on: no card, card fail or card full (not in circular recording)

Connected to computer

Orange LED on: charging

Green LED on: charging complete

Zetta Z15 HD Security Camcorder Quick Start Guide

Mode switch

Switch between surveillance, on-the-go and custom mode. Default setting is in bracket.

Note: For custom mode configuration, please use the configuration tool "Zetta Widget" to change the settings. The widget can be downloaded from <http://www.zetta.com.hk>. To make the custom mode settings take effective, please push the mode switch to the "custom mode" position before powering up Z15.

	Surveillance	On-the-GO	Custom (default)
Video Quality*	High	High	(High) / Medium / Low
Resolution*	640x360	1280x720	(1280x720) / 640x360
Frame Rate*	High	High	(High) / Low
Indoor Lighting Condition	50Hz	50Hz	(50Hz) / 60Hz / Outdoor
Day / Night Mode	Day mode	Day mode	(Day mode) / Night mode / Auto switching
Orientation	Normal	Normal	(Normal) / Up-side-down
Time Stamp	Enable	Enable	(Enable) / Disable
Circular Recording	Enable	Disable	(Enable) / Disable
Split File Time (min)	20	15	10 / (15) / 20
Mic	Enable	Enable	(Enable) / Disable
LED On / Off	On	On	(On) / Off
Voice-Trigger Sensitivity***	Disable	Disable	High / Medium / Low / (Disable)
Vibration-Trigger Sensitivity***	Disable	Disable	High / Medium / Low / (Disable)
Vibration Standby Mode	N/A	N/A	Fast Wake Up / (Power Saving)
Motion-Trigger Sensitivity***	Disable	Disable	High / (Medium) / Low / Disable
Auto On / Off	Disable	Disable	Car-activate Recording / Car-stop Recording / Car-activate and Car-stop Recording / Schedule Recording / (Disable)

When Z15 is connected to the lighter through the 5V car adapter and the auto on /off mode is selected:
Car-activate Recording: Auto start recording once car is started, auto stop recording when car is stopped.
Car-stop Recording: Auto start recording when car is stopped, auto stop recording once car is started.
Car-activate and Car-stop Recording: Auto start recording once car is started and continue to record even when car is stopped. Need to turn off the camcorder manually.

* For the longest recording time, set Video Quality to Low, Resolution to 640x360 and Frame Rate to Low, Z15 can act as a digital voice recorder.

** If recording is started, you cannot switch between modes.

*** If triggering is enabled, Z15 will record for 10 seconds after power-up. Then it will standby. If there is a trigger, it will keep recording until no further trigger. After that, it will record for 5 more minutes and then standby again.

Configuration Tool (Zetta Widget)

To synchronize the time and customize settings, download the configuration tool (Zetta Widget) from www.zetta.com.hk and follow the instructions in the software guide.

REMARK: If the time shown is year 2026 or beyond due to loss of Real Time Clock, recording time will not be shown on video even timestamp is enabled. Please use the widget to resync the time and delete files in 2026 or beyond!

Minimum System Requirements

Windows 2000, XP, Vista, 7, Mac OS X (mass storage class)

Windows Media Player 9

Intel Pentium class computer or Mac

USB 2.0 port for hi-speed transfers and charging

Connecting to computer

To connect the camcorder to your computer, follow these instructions:

- 1 Connect the larger end of USB cable into an available USB port on the computer.
- 2 Connect the smaller end of the cable into the USB port of the camcorder.
- 3 The camcorder will appear in My Computer as a removable drive.

Firmware upgrade

Zetta will from time to time release new firmware for enhancement or adding new features.

Visit www.zetta.com.hk to check it out.

Technical Support

Before contacting us, please visit the "Support" section in <http://www.zetta.com.hk>. For further questions on feature and usage, please contact us at (852) 31884492.

Environmental Requirements

Storage temperature: 32° to 113°F (0° to 45°C)

Operating temperature: 32° to 113°F (0° to 45°C)

Warranty

Please go to <http://www.zetta.com.hk> for online registration.

FCC Regulation

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1 This device may not cause harmful interference, and
- 2 This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and then on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1 Increase the separation between the equipment and camcorder.
- 2 Connect the equipment to a different outlet so that the equipment and camcorder are on different branch circuits.
- 3 Consult the dealer or an experienced radio / TV technician for help.

Zetta Z15 高清安保攝錄機快速入門指南

概述

感謝你購買 Zetta Z15 高清安保攝錄機！

Zetta Z15 高清安保攝錄機，有多功能觸發及多種自動開關模式。Z15 內置充電電池，可攝錄長達 10 小時有聲影片及待機超過 4 個月。插上 5 伏變壓器更可 168 小時循環攝錄。*

*實際時間和性能可能會有所不同，取決於環境和設置；電池不可更換。

特點

循環攝錄 - 當記憶卡容量不足時自動刪除較早前錄影片段，持續攝錄

時間標示 - 把時間標籤顯示於視頻內

時間預錄 - 預校時間自動攝錄，7 天循環

震動觸發攝錄 - 當 Z15 感到震動時才攝錄

移動觸發攝錄 - 當 Z15 偵測到物體移動時才攝錄

聲音觸發攝錄 - 當 Z15 偵測到有聲音時才攝錄

自動開關模式 - 於不同情況自動開或關

日間 / 夜間模式 - 選擇日間 / 夜間模式來適應你的環境，使影像更清晰

自動無縫分割文件 - 每 10 / 15 / 20 分鐘分割文件，更輕鬆傳送到視頻網站

攝錄方向 - 正常或反轉

解像度 - 1280 x 720 (720p) 或 640 x 360 (360p) 的視頻及聲音

可調幀率 - 降低幀率，以節省儲存空間

可調視頻質量 - 高 / 中 / 低

最大支持 64GB microSD (TF) 卡 (想有更好性能，請使用 class 4 或以上的卡，使用前請以 FAT32 格式化)

包裝內容

請打開你的 Zetta Z15 高清安保攝錄機包裝盒，並檢查下列配件：

Zetta Z15 高清安保攝錄機


5 伏變壓器

USB 2.0 連接線

快速入門指南

註：設置工具不包括在內，請於 <http://www.zetta.com.hk> 下載

Z15 高清安保攝錄機一覽

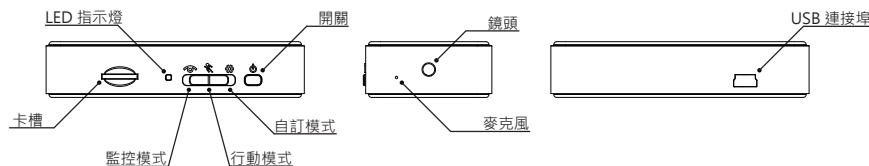

充電

Z15 配備一顆內置充電電池，第一次使用或不使用 Z15 一段長時間，切記要完全充電 6 小時以上及使用設置工具，重新同步時間 (詳情請見“設置工具 Widget”部份)。充電可通過電腦的 USB 接口或 5 伏變壓器進行。

要進行 USB 充電，請將 Z15 用 USB 線連接到電腦上可用的 USB 接口，燈號請見“狀態”。當連接到電腦時，你不能攝錄視頻。

另外，將 Z15 連接到 5V 變壓器，亦可進行充電，燈號請見“狀態”。視乎你的自動開關模式，你還可以同時攝錄視頻。

攝錄

電源按鈕位於 Z15 右側。

開始攝錄

緊按電源按鈕直到綠色 LED 發亮 (約 2 秒) 來開始攝錄。當你看見綠色 LED 閃爍時表示正在攝錄，否則請看“狀態”。

關機

緊按電源按鈕直到橙色 LED 關閉 (約 2 秒)。

警告：退出記憶卡前，請關上 Z15 攝錄機！

狀態

沒有插入 5 伏變壓器

綠色 LED 發亮：Z15 開啟

綠色 LED 閃爍：正常攝錄

綠色 / 紅色 LED 交替閃爍：低電量攝錄

紅色 LED 發亮：無卡，壞卡，低電量或卡已滿 (不在循環攝錄模式下)

插入 5 伏變壓器

橙色 LED 發亮：正在充電，沒有攝錄

綠色 LED 發亮：充電完成，沒有攝錄

綠色 LED 閃爍：充電完成並正在攝錄

綠色 / 橙色 LED 交替閃爍：充電並正在攝錄

紅色 LED 發亮：無卡，壞卡或卡已滿 (不在循環攝錄模式下)

連接到電腦

橙色 LED 發亮：正在充電

綠色 LED 發亮：充電完成

Zetta Z15 高清安保攝錄機快速入門指南

模式

切換監控、行動或自定模式，默認設置於括號內。

注意: 如要使用自定模式，請從 www.zetta.com.hk 下載設置工具更改設定，並於開機前將推鍵撥到“自定模式”才能生效。

	監控	行動	自訂 (默認)
視頻質量*	高	高	(高) / 中 / 低
解像度*	640x360	1280x720	(1280x720) / 640x360
幀率*	高	高	(高) / 低
室內照明頻率	50Hz	50Hz	(50Hz) / 60Hz / 室外
日間 / 夜間模式	日間模式	日間模式	(日間模式) / 夜間模式 / 自動切換
攝錄方向	正常	正常	(正常) / 反轉
時間標籤	啟用	啟用	(啟用) / 停用
循環攝錄	啟用	停用	(啟用) / 停用
分割文件時間 (分鐘)	20	15	10 / (15) / 20
麥克風	啟用	啟用	(啟用) / 停用
LED 顯示燈	亮	亮	(亮) / 不亮
聲量觸發靈敏度***	停用	停用	大 / 中 / 小 / (停用)
震動觸發靈敏度***	停用	停用	大 / 中 / 小 / (停用)
震動觸發待機模式	不適用	不適用	速動 / (省電)
移動偵測觸發靈敏度***	停用	停用	大 / (中) / 小 / 停用
自動開關模式	停用	停用	汽車起動自動攝錄 / 汽車熄火自動攝錄 / 汽車起動及熄火自動攝錄 / 預錄 / (停用)

用5伏汽車充電器連上車充，並選用自動開關模式：

汽車起動自動攝錄：汽車起動自動攝錄，汽車熄火自動開機

汽車熄火自動攝錄：汽車熄火自動攝錄，汽車起動自動開機

汽車起動及熄火自動攝錄：汽車起動自動攝錄，汽車熄火後仍然攝錄，要手動開機

* 如欲有最長攝錄時間，將視頻質量設為低，解像度設為640 x 360及幀率設為低，作用類似數碼錄音機。

** 如攝錄機已開始攝錄，你將不能切換攝錄模式。

*** 如使用觸發，Z15開機後會攝錄10秒，然後待機，若有觸發，攝錄會持續至沒有觸發，並會再攝錄多5分鐘，然後再待機。

設置工具Widget

如要設定時間或更改自訂模式的設置，請從www.zetta.com.hk下載設置工具並參照軟體使用指南。

注意: 如時間因時鐘丟失而顯示為2026年或以後，就算已啟用時間標示，這些影片都不會顯示攝錄時間。此時，請用此工具更新時間及刪除2026年或以後的檔案！

最低系統要求

Windows 2000 · XP · Vista · 7 · Mac OS X (Mass Storage Device)

Windows Media Player 9

英特爾奔騰級, Mac 或更高級電腦

USB 2.0高速傳輸連接埠

連接到電腦

要連接Zetta Z15微型攝錄機到電腦，請執行以下步驟：

1. 將USB線較大的一端連接到電腦上可用的USB接口。
2. 將USB線較小的一端插入Z15 USB接口。
3. Z15 安保攝錄機會出現在我的電腦。

固件升級

Zetta會不時發布新的固件，加強現有或增加新的功能，請到訪www.zetta.com.hk下載更新。

技術支援

在您聯繫技術支援之前，我們鼓勵您閱讀www.zetta.com.hk的技巧和疑難解答，看看您的問題是否已在那裡列出。如果您有Z15使用上或功能上的疑問或其他Zetta產品的問題，請到訪我們的知識庫www.zetta.com.hk或致電 (852) 31884492。

環境要求

儲存溫度: 華氏32至113度 (攝氏0至45度)

工作溫度: 華氏32至113度 (攝氏0至45度)

保修信息

請於www.zetta.com.hk網上登記保修。

FCC的規則

此設備符合FCC規則第15條。使用受以下兩個條件約束：

1. 該設備不會產生有害干擾
2. 此裝置必須接受任何收到的干擾，包括可能導致不理想操作的干擾。

本設備已經通過測試，符合FCC規則第15條Class B的限制。這些限制旨在在住宅安裝的情況下，提供合理的保護，防止有害干擾。本設備產生、使用、並能發射無線電頻率能量；如果沒有按照指示安裝和使用，可能會干擾無線電通訊。但是，我們不能保證干擾不會發生在特定的安裝情況下。如果本設備確實干擾無線電或電視接收，用戶可以使用一個或多個下列措施，嘗試糾正干擾：

1. 提高設備和Z15之間的距離。
 2. 使用不同的電源插座，使設備和Z15使用不同的分支電路。
 3. 諮詢經銷商或有經驗的無線電/電視技術人員尋求幫助。
- 一切保證及規則，皆以英文版本為準。